LME15E

15” LED Monitor

The LME15E 15” LED Monitor offers excellent picture quality and a sleek and pleasant design normally associated with higher end units. An impressive 700:1 contrast ratio and 1024 x 768 resolution and response time of 8ms gives you the ultimate performance and delivers crisp clear images.

This range of monitors also feature HDMI, VGA & BNC input capabilities providing various connection options. The slim design maximises desktop space and makes a perfect fit for almost any office or commercial application. The desk mount can be easily removed to allow the monitor to be fitted with any 75mm VESA accessories.

Key Features

- POS / ATM Terminals
- 1024(H) x 768(V) Resolution
- Wide Viewing Angle
- High Contrast Ratio
- Built in Speaker
- Multi language OSD
- Slim Design
- Fast Response Rate

V1.01

CBC GROUP

7-8 Garrick Industrial Centre, Irving Way, london NW9 6AQ, England
tel: technical support +44 (0)20 8732 3350 +44 (0)20 8732 3332
fax: +44 (0)20 8202 3387 www.cbceurope.com

RoHS 2002/95/EC
CE
ISO 9001 REGISTERED FIRM

LME15E

15" LED Monitor

Specifications

Description / Model	LME15E
MONITOR SPECIFICATION	
Display Type	15" (4:3) LED Monitor
Case Type	Plastic
Max Resolution	1024 (H) x 768 (V)
Pixel Pitch	0.297 (H) x0.297 (V)
Bezel Thickness	20mm
Display area	304 (H) x 228 (V) mm
Contrast ratio	700 : 1 Ratio
Brightness	350 cd/m²
Response time	8ms
Display Colours	16.7 M
Video Sychronization	Yes
PC Compatible Frequence	30-60KHz (H) / 56-75Hz (V) Max. 1024 x 768
Viewing Angle	U/D: 65° / 60°, L/R: 70° / 70°
Adjustable Colour Temperature	9300K / 6500K / 5800K / User
Video Compatability	Multi-Standard for NTSC / PAL
Aspect Ratio	4 : 3 Ratio
VGA Auto Frequency Correction	Yes
Speakers	Multimedia speakers
Number of Speakers	Right x 1 Left x 1, 2.5W
Sound Demodulation	Stereo. Audio
Mute	Yes
Work Temperature / Humidity	Temperature: - 10 to 50 °C Humidity: 20 % - 70 %
Volume +/- Power ON/OFF	Yes
OSD Control	Contrast, Brightness, Clock, Phase, H-Position, V-Position, Language
OSD Language	English, French, German, Spanish, Italian, Russian, Polish and Portuguese

NB. Specification subject to change without notification

IN / OUT INTERFACE	
Video Interface	HDMI x1, VGA x1, BNC x2 In / BNC x 1 Out
Audio Interface	Audio in x 1
Power Interface	AC in x 1
Termination	75 Ohms (Automatic Termination)
Safety & EMC	Energy Star / CE / FCC / ROHS
Vesa Standard Mount	75mm x 75mm
Stand Type	Desktop
Colour	Black
Monitor Dimension (Without Base)	346 (W) x 266 (H) x 62 (D) mm
Packing Dimension	410 (W) x 410 (H) x 142 (D) mm
NET Weight	2.9 Kgs
GROSS Weight	3.85 Kgs
POWER	
Power Supply	12VDC, 3A
Voltage	AC100 - 240V 50 / 60Hz
Power Consumption	< 30W in "ON" Mode
Accessories	Power Supply / Power Lead / VGA Cable / Audio cable / User Manual

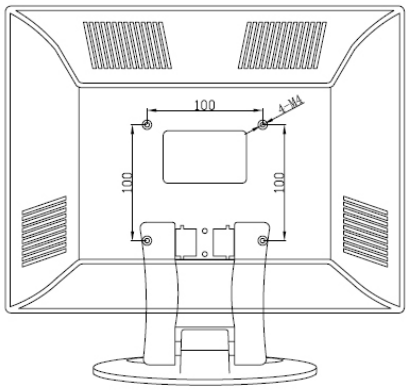

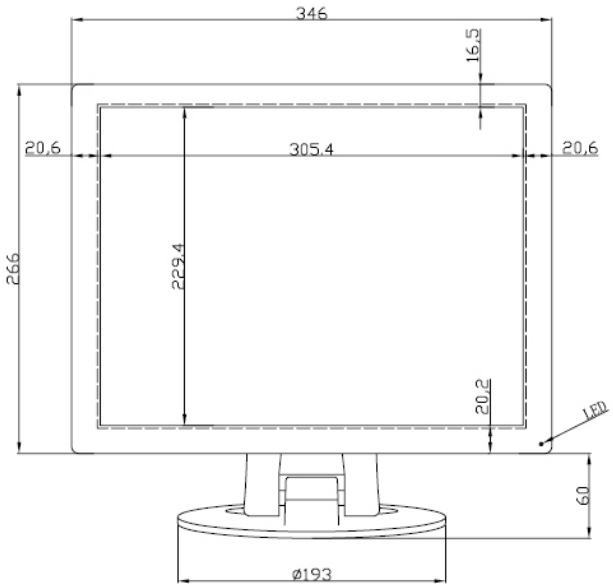

V1.01

CBC GROUP
7-8 Garrick Industrial Centre, Irving Way, london NW9 6AQ, England
tel: technical support +44 (0)20 8732 3350 +44 (0)20 8732 3332
fax: +44 (0)20 8202 3387 www.cbceurope.com

RoHS 2002/95/EC
CE
ISO 9001 REGISTERED FIRM